

## RG 11 A / U


### KOAKSİYEL KABLoları COAXIAL CABLES

#### YAPISI / CONSTRUCTION



STANDARD  
MIL-C-17

- 1 İLETKEN / CONDUCTOR  
7 x 0,40 mm SnCu
- 2 YALITKAN / INSULATION  
PE
- 3 EKran / SCREENING  
Cu örgü / Cu braiding
- 4 DİŞKILIF / JACKET  
PVC siyah / black

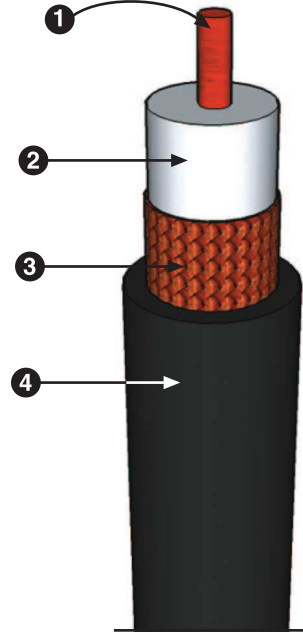

#### TEKNİK VERİLER / TECHNICAL DATA

1. EMPEdANS / IMPEDANCE  
75 ± 3
2. KAPASİTE / CAPACITANCE  
67 pF/m
3. YAYILMA HIZI / VELOCITY RATIO  
0,66
4. ÇALIŞMA SICAKLIĞI / TEMP RANGE  
-40 / +70 °C
5. TEST GERİLİMİ / TEST VOLTAGE  
5 KV
6. ZAYIFLATMA / ATTENUATION  
100 MHz 7 dB  
200 MHz 9,6 dB  
500 MHz 17 dB  
800 MHz 20 dB

- RG 11 AU Düşük zayıflatma gerektiren anten ve cihazlarda ses ve görüntü kablosu olarak kullanılır.
- RG 11 AU This coaxial used in Audio-Video connections where low attenuation is required.

#### SİPARİŞ BİLGİLERİ / ORDERING DATA

AMBALAJ MİKTARLARI / SPOll SIZES : 100-200-500-1000 mt