

RG 59 / U-4

KOAKSİYEL KABLoları COAXIAL CABLES

YAPISI / CONSTRUCTION



STANDARD
MIL-C-17


- 1 İLETKEN / CONDUCTOR
0,80 mm Cu
- 2 YALITKAN / INSULATION
Köpüklü PE / foam PE
- 3 EKran 1 / SCREENING 1
Al folyo / Al foil
- 4 EKran 2 / SCREENING 2
SnCu örgü / SnCu braiding
- 5 DIŞKILIF / JACKET
PVC beyaz / white

TEKNİK VERİLER / TECHNICAL DATA

1. EMPEDANS / IMPEDANCE
75 ± 2
2. KAPASİTE / CAPACITANCE
57 pF/m
3. YAYILMA HIZI / VELOCITY RATIO
0,78
4. ÇALIŞMA SICAKLIĞI / TEMP RANGE
-40 / +70 °C
5. TEST GERİLİMİ / TEST VOLTAGE
800 V
6. ZAYIFLATMA / ATTENUATION
100 MHz 8,5 dB
200 MHz 13 dB
500 MHz 24 dB
800 MHz 27 dB

SİPARİŞ BİLGİLERİ / ORDERING DATA

AMBALAJ MİKTARLARI / SPOLL SIZES : 100-200-500-1000 mt

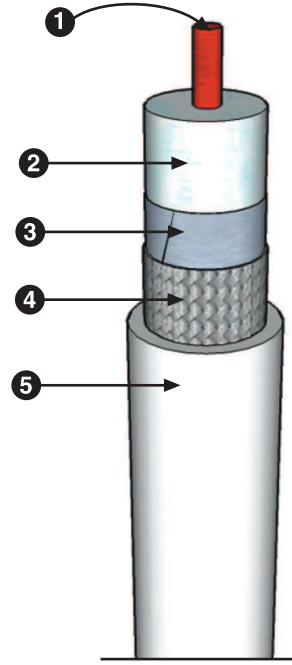

- RG59/U4 Kapalı alanlarda CCTV, TV ve uydu anten sistemlerinde ses ve görüntü almak için kullanılır.
- RG59/U4 This coaxial generally used in CCTV systems, TV-satellite connections for audio and video transmission. Not suitable for outside use.

E