


RG 62 A / U

KOAKSİYEL KABLoları COAXIAL CABLES



- RG 62 A/U IBM sistemlerinde, PC lerde, dijital haberleşme sistemlerinde kullanılır.
- RG 62 A/U This cable generally used in IBM systems, PC connections and digital communication systems.

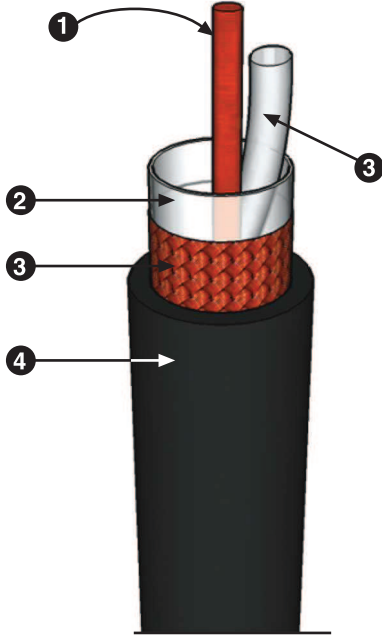

YAPISI / CONSTRUCTION

STANDARD
MIL-C-17

- 1 İLETKEN / CONDUCTOR
0,65 mm sert Cu / bare hard Cu
- 2 YALITKAN / INSULATION
Hava boşluklu PE / AIR PE
- 3 AYIRICI / DIVIDER
PE
- 4 EKran / SCREENING
Cu bakır örgü / Cu braiding
- 5 DIŞKILIF / JACKET
PVC siyah / black

TEKNİK VERİLER / TECHNICAL DATA

1. EMPEDANS / IMPEDANCE
93 ± 2
2. KAPASİTE / CAPACITANCE
44 pF/m
3. YAYILMA HIZI / VELOCITY RATIO
0,85
4. ÇALIŞMA SICAKLIĞI / TEMP RANGE
-40 / +70 °C
5. TEST GERİLİMİ / TEST VOLTAGE
0,5 KV
6. ZAYIFLATMA / ATTENUATION
100 MHz 10 dB
200 MHz 14 dB
500 MHz 24 dB
800 MHz 32 dB

SİPARİŞ BİLGİLERİ / ORDERING DATA

AMBALAJ MİKTARLARI / SPOIL SIZES : 100-200-500-1000 mt

E