

## RG 12


### KOAKSİYEL KABLoları COAXIAL CABLES

#### YAPISI / CONSTRUCTION



STANDARD  
MIL-C-17

- 1 İLETKEN / CONDUCTOR  
7 x 0,40 mm AgCu
- 2 YALITKAN / INSULATION  
PE
- 3 EKran 1 / SCREENING 1  
Cu örgü / Cu braiding
- 4 ARA KILIF / INNER SHEATH  
PVC
- 5 GENEL EKran-ZIRH/OVERALL SCREEN-ARMOUR  
Galvaniz çelik tel örgü / galvanized steel wire braiding
- 6 DIŞKILIF / JACKET  
PVC siyah / black

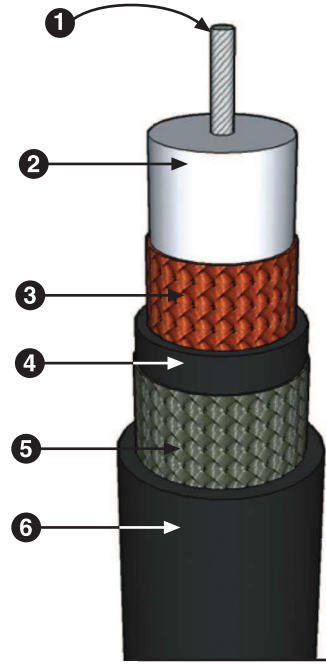

#### TEKNİK VERİLER / TECHNICAL DATA

1. EMPEdANS / IMPEDANCE  
75 ± 3
2. KAPASİTE / CAPACITANCE  
67 pF/m
3. YAYILMA HIZI / VELOCITY RATIO  
0,66
4. ÇALIŞMA SICAKLIĞI / TEMP RANGE  
-40 / +70 °C
5. TEST GERİLİMİ / TEST VOLTAGE  
5 KV
6. ZAYIFLATMA / ATTENUATION  
100 MHz 6,8 dB  
200 MHz 9,4 dB  
500 MHz 15,5 dB  
800 MHz 20 dB

- RG 12-Düşük zayıflatma gerektiren anten ve cihazlar arasında, trafo merkezlerinde sinyal iletimi için kullanılır.
- RG 12-This coaxial used in Audio-Video connections and transformer stations, where low attenuation is required.

#### SİPARİŞ BİLGİLERİ / ORDERING DATA

AMBALAJ MİKTARLARI / SPOLL SIZES : 100-200-500-1000 mt