


## MXH

### Halojeniz Marin Güç ve Sinyal Kablosu Halogenfree Marine Power and Signalization Cables

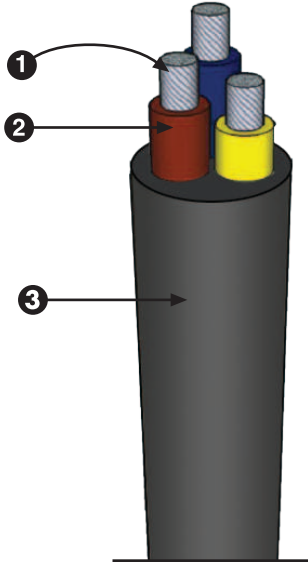

RoHS

CE

#### YAPISI / CONSTRUCTION

STANDARD  
IEC 60092-350 / 353

- 1 İLETKEN / CONDUCTOR  
IEC 60228 VDE 0295 Class 5 SnCu
- 2 YALITKAN / INSULATION  
XLPE
- 3 DIŞ KILIF / JACKET  
HF Siyah / Black

#### TEKNİK VERİLER / TECHNICAL DATA

1. BÜKÜM ÇAPI / BENDING RADIUS  
15 x kablo çapı  
15 x cable diameter
2. ÇALIŞMA GERİLİMİ / WORKING VOLTAGE  
450-750 V
3. TEST GERİLİMİ / TEST VOLTAGE  
450-750 V 2.5 KV
4. ÇALIŞMA SICAKLIĞI / TEMP RANGE  
Hareketli kullanım / Flex using  
-5 / +70 °C  
Sabit kullanım / Fixed using  
-40 / +70 °C
5. YALITIM DİRENCİ / INSULATION RESISTANCE  
min. 20 M Ω km

#### SİPARİŞ BİLGİLERİ / ORDERING DATA

#### AÇIKLAMA / NOTES

STANDART ÜRETİM / STANDART PRODUCT

(J) : Damarlar renk kodlu + sarı-yeşil damar

ÖZEL ÜRETİM / SPECIAL PRODUCE

(JZ) : Siyah damar (numara kodlu) + sarı-yeşil damar

(OZ) : Siyah damar (numara kodlu)

Coloured cores and green-yellow core

Black cores (numbered) + green-yellow core

Black cores (numbered)

AMBALAJ MİKTARLARI / SPOOL SIZES : 300-500-1000 mt

CE : Ürün, 73/23/EWG ve 93/68/EWG sayılı düşük voltaj yönetmeliğine uygundur.  
: The product is conformed with the EC Low-Voltage Directive 73/23/EEC and 93/68/EEC