

## H03VH-H


### BİTİŞİK YASSI KABLOLAR TWIN FLAT CABLES

#### YAPISI / CONSTRUCTION



STANDARD  
TS 9760 / HD 21,5 S3

1. İLETKEN / CONDUCTOR  
IEC 60228 VDE 0295 Class 5 Cu
2. DIŞKILIF / JACKET  
PVC T12

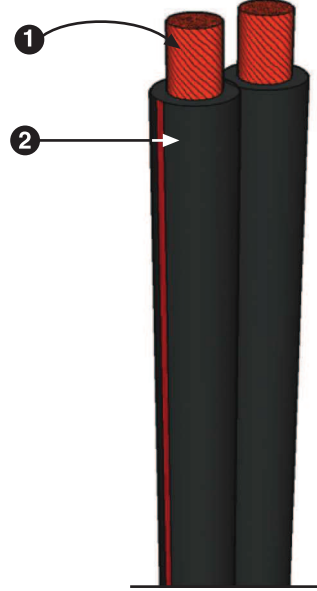

#### TEKNİK VERİLER / TECHNICAL DATA

1. BÜKÜM ÇAPI / BENDING RADIUS  
5 x kablo çapı  
5 x cable diameter
2. ÇALIŞMA GERİLİMİ / WORKING VOLTAGE  
300-300 V
3. TEST GERİLİMİ / TEST VOLTAGE  
2,0 KV
4. ÇALIŞMA SICAKLIĞI / TEMP RANGE  
Hareketli kullanım / Flex using  
-5 / +70 °C  
Sabit kullanım / Fixed using  
-40 / +80 °C
5. YALITIM DİRENCİ / INSULATION RESISTANCE  
min.20 MΩkm

- H03VH-H iki damar yan yana bükümsüz yapıdaki bu kablolar, düşük akım gerektiren cihazlarda, avize, lamba bağlantılarında, el aletlerinde kullanılır.
- H03VH-H's construction is two conductors side by side in a flat shape. These cables are used in fixed installations, in kitchens, offices, light duty applications, lights and small electrical apparatus.

#### SİPARİŞ BİLGİLERİ / ORDERING DATA

ÜRÜN KESİTLERİ / PRODUCT CROSS SECTIONS : 2x0,50 / 2x0,75 / 2x1,0 mm<sup>2</sup>

AMBALAJ MİKTARLARI / SPOOL SIZES : 100 / 500 / 1000 mt

CE : Ürün, 73/23/EWG ve 93/68/EWG sayılı düşük voltaj yönetmeliğine uygundur.  
: The product is conformed with the EC Low-Voltage Directive 73/23/EEC and 93/68/EEC