


H05RR-F

Kauçuk Besleme Kablosu
Rubber Sheathed Supply Cable

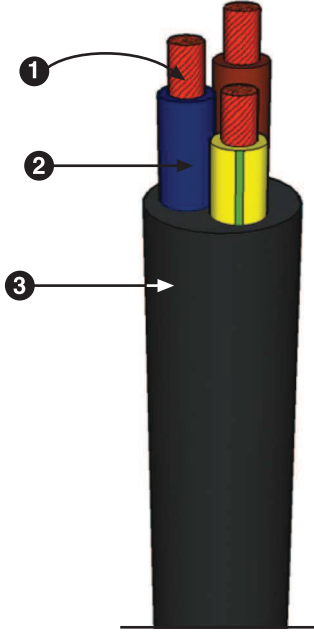

YAPISI / CONSTRUCTION

STANDARD
TS EN 50525-2-21 IEC 60227

- 1 İLETKEN / CONDUCTOR
Solid / Bükülü IEC 60228 VDE 0295 Class 5,6 Cu SnCu
Solid / Stranded IEC 60228 VDE 0295 Class 5,6 Cu SnCu
- 2 YALITKAN / INSULATION
Kauçuk / Rubber
Damar Renkleri / Core Colors VDE 0293
- 3 DIŞKILIF / JACKET
Nitrilli Kauçuk / Rubber - Siyah / black

TEKNİK VERİLER / TECHNICAL DATA

1. BÜKÜM ÇAPI / BENDING RADIUS
7,5 x kablo çapı
7,5 x cable diameter
2. ÇALIŞMA GERİLİMİ / WORKING VOLTAGE
300-500 V
3. TEST GERİLİMİ / TEST VOLTAGE
2000 V
4. ÇALIŞMA SICAKLIĞI / TEMP RANGE
Hareketli kullanım / Flex using
-30 / +60 °C
5. YALITIM DİRENCİ / INSULATION RESISTANCE
min.20 MΩ km

- H05RR-F Bu kablolar, elektrikli süpürge, ütüler, lehim aletleri, mutfak aletleri, ekmek kızartma makinesi, ocaklar gibi elektrikli cihazlarda kullanım için uygundur. Ayrıca evlerde ve ofislerde orta mekanik stres için kullanılırlar.
Ayrıca bu kablolar bölme duvarlarda, mobilyalarda, dekorasyon kaplamalarında ve prefabrik bina bölümlerinin boşluklarında sabit montaja uygundur.
- H05RR-F These cables are suitable for connecting electrical appliances, for example vacuum cleaner, flat irons, soldering irons, kitchen appliances, toaster, stoves etc. They were also used for medium mechanical stress in households and offices.
These cables are suitable for fixed installation in partition walls, furniture, decoration covering and in hollow spaces of prefabricated buildings parts.

CE : Ürün, 73/23/EWG ve 93/68/EWG sayılı düşük voltaj yönetmeliğine uygundur.
: The product is conformed with the EC Low-Voltage Directive 73/23/EEC and 93/68/EEC

