

# H05VVC4V5-K (NYSLYCYÖ-JZ)


Genel Blendajlı, Damarları Numara Kodlu, Yağa Dayanıklı PVC Kontrol Kablosu  
Overall Screened, Number Coded, Oil Resistant PVC Control Cables



## YAPISI / CONSTRUCTION

STANDARD  
DIN VDE 0281 BÖLÜM 13  
HD 21,13 S1, IEC 60227/74

- 1 İLETKEN / CONDUCTOR  
IEC 60228 VDE 0295 Class 5 SnCu
- 2 YALITKAN / INSULATION  
DIN VDE 0281 PVC T12  
DAMAR RENKLERİ / CORE COLOURS  
VDE 0293 (J) (JZ) (OZ)
- 3 ARA KILIF / INNER SHEATH  
PVC TM12
- 4 GENEL EKRAM / OVERALL SCREEN  
Bakır örgü / copper wire braid
- 5 DIŞ KILIF / JACKET  
Yağa dayanıklı / oil resistant PVC TM5  
DIN VDE 0281, HD21,1S2 A16 GRİ / GRAY

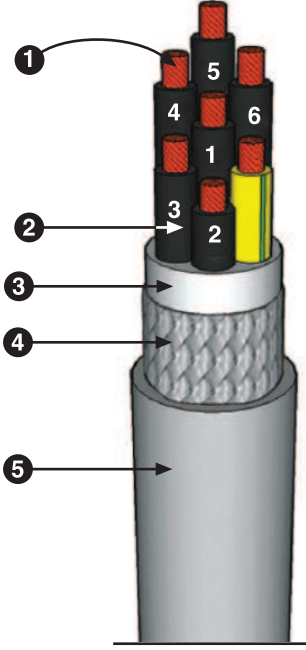

- H05VVC4V5-K (NYSLYCYÖ-JZ) Damarları katlar şeklinde bükülü, bakır blendajlı ve PVC dış izolasyonlu bu kablolar, kumanda panoları, makineler arasında üretim ve montaj departmanlarında, sinyal - kumanda kablosu olarak kullanılır. Bakır örgü ekranlama parazitsiz veri transferi sağlar. Çeşitli kimyasal etkenler ve yağa karşı dayanıklıdır.
- H05VVC4V5-K (NYSLYCYÖ-JZ) construction conductors is stranding in layers, overall Cu braiding screen and oil resistant PVC outer jacket. These cables used for flexible use for medium mechanical stresses with free movement without tensile stress in dry and moist rooms but not suitable for open air. Designed as control and connecting cables for control equipment, machines, conveyor belts, producing lines.

## AÇIKLAMA / NOTES

### STANDART ÜRETİM / STANDART PRODUCT

(JZ) : Siyah damar (numara kodlu) + sarı-yeşil damar Black cores (numbered) + green-yellow core

(OZ) : Siyah damar (numara kodlu) Black cores (numbered)

### ÖZEL ÜRETİM / SPECIAL PRODUCE

(J) : Damarlar renk kodlu + sarı-yeşil damar Coloured cores and green-yellow core

## SİPARİŞ BİLGİLERİ / ORDERING DATA

CE : Ürün, 73/23/EWG ve 93/68/EWG sayılı düşük voltaj yönetmeliğine uygundur.  
: The product is conformed with the EC Low-Voltage Directive 73/23/EEC and 93/68/EEC

KOD NO. Code No.	KESİT mm <sup>2</sup> Cross Sec mm <sup>2</sup>	ÇAP mm Dia mm	KG/KM kg/km
3K1500105	2x0,50	8	94,5
3K1500205	3x0,50	8,5	108,3
3K1500305	4x0,50	9,4	133,2
3K1500405	5x0,50	10	149,6
3K1500505	6x0,50	11	180,6
3K1500605	7x0,50	11	184,5
3K1500705	8x0,50	12,1	221,5
3K1500805	10x0,50	13,4	255,4

KOD NO. Code No.	KESİT mm <sup>2</sup> Cross Sec mm <sup>2</sup>	ÇAP mm Dia mm	KG/KM kg/km
3K1501005	14x0,50	14,6	318,4
3K1501105	16x0,50	15,4	343,5
3K1501205	19x0,50	16,3	387,9
3K1501305	25x0,50	18,9	517,1
3K1501405	30x0,50	19,9	590,5
3K1501505	36x0,50	21,5	684,4
3K1501605	40x0,50	22,3	745,6
3K1501705	50x0,50	24,9	898,7

AMBALAJ MİKTARLARI SPOOL SIZES
500-1000 mt
500-1000 mt
500-1000 mt
500-1000 mt
500-1000 mt
500-1000 mt
500-1000 mt
500-1000 mt
500-1000 mt

## H05VVC4V5-K (NYSLYCYÖ-JZ)

Genel Blendajlı, Damarları Numara Kodlu, Yağa Dayanıklı PVC Kontrol Kablosu  
Overall Screened, Number Coded, Oil Resistant PVC Control Cables

### SİPARİŞ BİLGİLERİ / ORDERING DATA

KOD NO. Code No.	KESİT mm <sup>2</sup> Cross Sec mm <sup>2</sup>	ÇAP mm Dia mm	KG/KM kg/km	KOD NO. Code No.	KESİT mm <sup>2</sup> Cross Sec mm <sup>2</sup>	ÇAP mm Dia mm	KG/KM kg/km	KOD NO. Code No.	KESİT mm <sup>2</sup> Cross Sec mm <sup>2</sup>	ÇAP mm Dia mm	KG/KM kg/km
3K15 01805	2x0,75	8,6	109,2	3K15 03505	2x1,0	9,2	124,8	3K15 05205	2x1,5	10,1	146,9
3K15 01905	3x0,75	9,2	130,3	3K15 03605	3x1,0	9,8	146,8	3K15 05305	3x1,5	10,8	177,1
3K15 02005	4x0,75	9,9	150,6	3K15 03705	4x1,0	10,7	181,4	3K15 05405	4x1,5	11,7	216,1
3K15 02105	5x0,75	10,9	183,6	3K15 03805	5x1,0	11,4	205,8	3K15 05505	5x1,5	12,7	264,5
3K15 02205	6x0,75	11,6	210,2	3K15 03905	6x1,0	12,4	242,4	3K15 05605	6x1,5	14	318,2
3K15 02305	7x0,75	11,6	215,8	3K15 04005	7x1,0	12,4	249,7	3K15 05705	7x1,5	14	329
3K15 02405	8x0,75	13,2	270,3	3K15 04105	8x1,0	14,4	317,6	3K15 05805	8x1,5	15,9	408,7
3K15 02505	10x0,75	14,6	309,9	3K15 04205	10x1,0	15,4	355,2	3K15 05905	10x1,5	17,6	464,6
3K15 02605	12x0,75	15	344,4	3K15 04305	12x1,0	16	17,7	3K15 06005	12x1,5	18,3	524,5
3K15 02705	14x0,75	15,5	374,4	3K15 04405	14x1,0	17	451	3K15 06105	14x1,5	19,2	584
3K15 02805	16x0,75	16,6	423,4	3K15 04505	16x1,0	17,7	494,3	3K15 06205	16x1,5	20,3	662,9
3K15 02905	19x0,75	17,5	480	3K15 04605	19x1,0	18,9	574,8	3K15 06305	19x1,5	21,2	745,4
3K15 03005	25x0,75	20,4	634,5	3K15 04705	25x1,0	22	752,7	3K15 06405	25x1,5	24,8	946,4
3K15 03105	30x0,75	21,7	730,1	3K15 04805	30x1,0	23,2	854,6	3K15 06505	30x1,5	26,2	1.110
3K15 03205	36x0,75	23,3	839,4	3K15 04905	36x1,0	24,9	980,3	3K15 06605	36x1,5	28,1	1.282
3K15 03305	40x0,75	24	897,8	3K15 05005	40x1,0	25,7	1.062	3K15 06705	40x1,5	29,5	1.423
3K15 03405	50x0,75	27	1.108,4	3K15 05105	50x1,0	29,2	1.328	3K15 06805	50x1,5	32,9	1.730
3K1506905	2x2,5	11,8	217	3K1508205	2x4,0	13,1	284	3K1509705	2x16,0	21,1	813,4
3K1507005	3x2,5	12,8	261	3K1508305	3x4,0	14,1	350,2	3K1509805	3x16,0	22,5	1.007
3K1507105	4x2,5	14,1	321	3K1508405	4x4,0	15,6	425	3K1509905	4x16,0	25,2	1.252
3K1507205	5x2,5	15,1	382	3K1508505	5x4,0	17,1	514,9				
3K1507305	6x2,5	16,3	448	3K1508605	7x4,0	18,8	645,8	3K1510205	2x25,0	26,9	1.262
3K1507405	7x2,5	16,3	465					3K1510305	3x25,0	28,8	1.563
3K1507505	8x2,5	18,8	594	3K1508705	2x6,0	14,6	396	3K1510405	4x25,0	32,1	1.986
3K1507605	10x2,5	20,9	676	3K1508805	3x6,0	15,5	445,3				
3K1507705	12x2,5	21,9	768	3K1508905	4x6,0	17,1	549,8	3K1510705	2x35,0	31,2	1.708
3K1507805	14x2,5	22,8	818	3K1509005	5x6,0	19	680,5	3K1510805	3x35,0	33,7	2.145
3K1507905	16x2,5	24	943	3K1509105	7x6,0	20,7	853,7	3K150905	4x35,0	37,7	2.732
3K1508005	19x2,5	25,2	1.070								
3K1508105	25x2,5	29,6	1.407	3K1509205	2x10,0	18,1	569	3K1511005	2x50,0	35,8	2.935
				3K1509305	3x10,0	19,6	721,5	3K1511105	3x50,0	38,2	2.935
				3K1509405	4x10,0	21,8	900	3K1511205	4x50,0	41,5	3.557
				3K1509505	5x10,0	23,9	1.089				
				3K1509605	7x10,0	26,1	1.374	3K1511605	2x70,0	41,6	3.177
								3K1511705	3x70,0	45,3	4.097
								3K1511805	4x70,0	51	5.269

