


# TAŞIT KABLOSU / VEHICLE CABLE FLY

+125°C TAŞIT KABLOLARI  
+125°C VEHICLE CABLE FLY

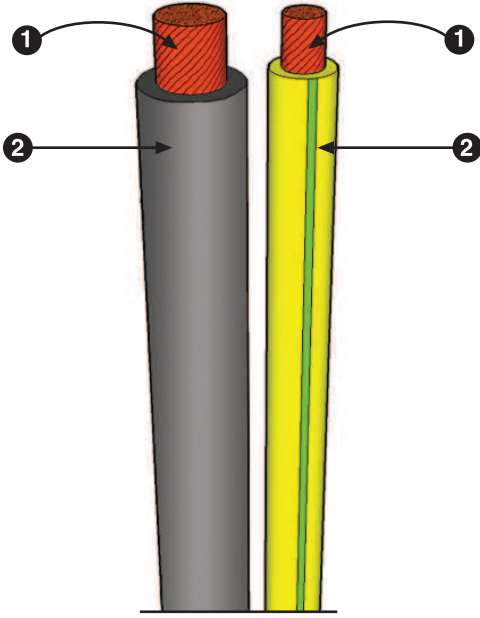

RoHS

CE

## YAPISI / CONSTRUCTION

STANDARD  
TS 9760/HD 21,5 S3

1. İLETKEN / CONDUCTOR  
IEC 60228 VDE 0295 Class 1,2,5,6 Cu SnCu  
Bükülü Bakır / Stranded Copper
2. YALITKAN / INSULATION  
PVC

## TEKNİK VERİLER / TECHNICAL DATA

1. BÜKÜM ÇAPI / BENDING RADIUS  
8 x kablo çapı  
8 x cable diameter
2. ÇALIŞMA GERİLİMİ / WORKING VOLTAGE  
300-500 V
3. TEST GERİLİMİ / TEST VOLTAGE  
2 KV
4. ÇALIŞMA SICAKLIĞI / TEMP RANGE  
FLY -25 / +125 °C
5. YALITIM DİRENCİ / INSULATION RESISTANCE  
min.20 MΩ km

- Taşıt Kablosu PVC izoleli tek damarlı kablolar araç konstrüksiyonlarında kullanılır.
- Vehicle Cable FLY PVC insulated single core cables are used for vehicle constructions.

CE : Ürün, 73/23/EWG ve 93/68/EWG sayılı düşük voltaj yönetmeliğine uygundur.  
: The product is conformed with the EC Low-Voltage Directive 73/23/EEC and 93/68/EEC