


YSLY-JZ

Damarları Numara Kodlu Ince, Hafif Kontrol Kablosu
Thin and Lighter Control Cables With Number Coded Conductors

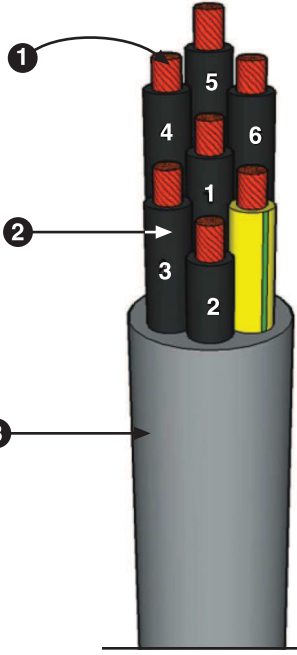

YAPISI / CONSTRUCTION

- 1 İLETKEN / CONDUCTOR
IEC 60228 VDE 0295 Class 5 Cu
- 2 YALITKAN / INSULATION
VDE 0207 PVC Y12
DAMAR RENKLERİ / CORE COLOURS
VDE 0293 (J) (JZ) (OZ)
- 3 DIŞKILIF / JACKET
PVC YM2 GRİ / GRAY

TEKNİK VERİLER / TECHNICAL DATA

1. BÜKÜM ÇAP / BENDING RADIUS
10 x kablo çapı
10 x cable diameter
2. ÇALIŞMA GERİLİMİ / WORKING VOLTAGE
300-500 V
3. TEST GERİLİMİ / TEST VOLTAGE
2,5 KV
4. ÇALIŞMA SICAKLIĞI / TEMP RANGE
Hareketli kullanım / Flex using
-5 / +50 °C
Sabit kullanım / Fixed using
-30 / +70 °C
5. YALITIM DİRENCİ / INSULATION RESISTANCE
min.20 MΩ km

● YSLY-JZ Damarları katlar şeklinde bükülü ve PVC dış izolasyonlu yapıdaki bu kablolar, makine, cihaz, pano bağlantılarında, ısıtma, soğutma, havalandırma sistemlerinde kuru ve nemsiz ortamlarda kontrol ve kumanda kablosu olarak kullanılır.

● YSLY-JZ construction is conductors stranding in layers with PVC outer jacket. Used for measuring and data processing in the machine tool manufacturing, control panels, control systems, in dry and wet interiors at medium mechanical stress. It is not suitable for continuously movements and tensile load.

AÇIKLAMA / NOTES

STANDART ÜRETİM / STANDART PRODUCT

(JZ) : Siyah damar (numara kodlu) + sarı-yeşil damar

(OZ) : Siyah damar (numara kodlu)

ÖZEL ÜRETİM / SPECIAL PRODUCE

(J) : Damarlar renk kodlu + sarı-yeşil damar

Black cores (numbered) + green-yellow core
Black cores (numbered)

Coloured cores and green-yellow core

SİPARİŞ BİLGİLERİ / ORDERING DATA

KOD NO. Code No.	KESİT mm² Cross Sec mm²	ÇAP mm Dia mm	KG/KM kg/km
3K1200105	2x0,50	4,9	38,9
3K1200205	3x0,50	5,3	47,3
3K1200305	4x0,50	5,8	55,6
3K1200405	5x0,50	6,3	66,5
3K1200505	6x0,50	7,1	81,8
3K1200605	7x0,50	7,1	85,6
3K1200705	8x0,50	8,2	110,5
3K1200805	10x0,50	8,9	130,5
3K1200905	12x0,50	9,5	152,8

KOD NO. Code No.	KESİT mm² Cross Sec mm²	ÇAP mm Dia mm	KG/KM kg/km
3K1201005	14x0,50	10,1	179,6
3K1201105	16x0,50	10,8	202,5
3K1201205	19x0,50	11,4	228
3K1201305	25x0,50	13	279,7
3K1201405	30x0,50	13,8	329,9
3K1201505	36x0,50	15	386,6
3K1201605	40x0,50	15,7	428,6
3K1208105	50x0,50	17,9	533,1

AMBALAJ MİKTAR Spool Sizes
500-1000 mt
500-1000 m
500-1000 mt
500-1000 m
500-1000 mt
500-1000 m
500-1000 mt
500-1000 m

CE : Ürün, 73/23/EWG ve 93/68/EWG sayılı düşük voltaj yönetmeliğine uygundur.
: The product is conformed with the EC Low-Voltage Directive 73/23/EEC and 93/68/EEC



YSLY-JZ

Damarları Numara Kodlu İnce, Hafif Kontrol Kablosu
Thin and Lighter Control Cables With Number Coded Conductors

SİPARİŞ BİLGİLERİ / ORDERING DATA

KOD NO. Code No.	KESİT mm ² Cross Sec mm ²	ÇAP mm Dia mm	KG/KM kg/km	KOD NO. Code No.	KESİT mm ² Cross Sec mm ²	ÇAP mm Dia mm	KG/KM kg/km	AMBALAJ MİKTARLARI Spool Sizes
3K1201705	2x0,75	5,5	46,8	3K1203305	2x1,0	5,9	55,4	500-1000 mt
3K1201805	3x0,75	5,8	56,5	3K1203405	3x1,0	6,2	67,4	500-1000 mt
3K1201905	4x0,75	6,5	72,3	3K1203505	4x1,0	7	86,4	500-1000 mt
3K1202005	5x0,75	7,1	85,3	3K1203605	5x1,0	7,6	103,9	500-1000 mt
3K1202105	6x0,75	7,9	106	3K1203705	6x1,0	8,5	127	500-1000 mt
3K1202205	7x0,75	7,9	111,5	3K1203805	7x1,0	8,5	134,1	500-1000 mt
3K1202305	8x0,75	8,8	136,3	3K1203905	8x1,0	9,8	171,7	500-1000 mt
3K1202405	10x0,75	9,8	157,5	3K1204005	10x1,0	10,8	195,7	500-1000 mt
3K1202505	12x0,75	10	179,7	3K1204105	12x1,0	11,3	227,9	500-1000 mt
3K1202605	14x0,75	11	205,3	3K1204205	14x1,0	11,8	258,7	500-1000 mt
3K1202705	16x0,75	11,4	224,9	3K1204305	16x1,0	12,5	290,1	500-1000 mt
3K1202805	19x0,75	12,1	265,7	3K1204405	19x1,0	13,3	339,6	500-1000 mt
3K1202905	25x0,75	14,4	351,9	3K1204505	25x1,0	15,8	445,3	500-1000 mt
3K1203005	30x0,75	15,3	411,5	3K1204605	30x1,0	16,8	519,5	500-1000 mt
3K1203105	36x0,75	16,6	486,3	3K1204705	36x1,0	18,3	612,5	500-1000 mt
3K1203205	40x0,75	17,4	535	3K1204805	40x1,0	19,7	687,9	500-1000 mt
3K1208205	50x0,75	19,8	665,5	3K1208305	50x1,0	21,7	845,3	500-1000 mt

KOD NO. Code No.	KESİT mm ² Cross Sec mm ²	ÇAP mm Dia mm	KG/KM kg/km	KOD NO. Code No.	KESİT mm ² Cross Sec mm ²	ÇAP mm Dia mm	KG/KM kg/km	AMBALAJ MİKTARLARI Spool Sizes
3K1204905	2x1,5	6,8	74,8	3K1206505	2x2,5	8	109,2	500-1000 mt
3K1205005	3x1,5	7,4	95,1	3K1206605	3x2,5	8,7	139,9	500-1000 mt
3K1205105	4x1,5	8,3	121,4	3K1206705	4x2,5	9,7	178,6	500-1000 mt
3K1205205	5x1,5	9	146,4	3K1206805	5x2,5	10,6	216,2	500-1000 mt
3K1205305	6x1,5	10	178,5	3K1206905	6x2,5	11,7	262,8	500-1000 mt
3K1205405	7x1,5	10	188,4	3K1207005	7x2,5	11,7	279,6	500-1000 mt
3K1205505	8x1,5	11,6	240,2	3K1207105	8x2,5	13,6	324,3	500-1000 mt
3K1205605	10x1,5	12,8	265,6	3K1207205	10x2,5	15,2	396,9	500-1000 mt
3K1205705	12x1,5	13,3	308	3K1207305	12x2,5	15,8	459,4	500-1000 mt
3K1205805	14x1,5	14,1	356,4	3K1207405	14x2,5	16,7	525,8	500-1000 mt
3K1205905	16x1,5	15	401,3	3K1207505	16x2,5	17,7	604,4	500-1000 mt
3K1206005	19x1,5	15,9	465	3K1207605	19x2,5	18,8	702,3	500-1000 mt
3K1206105	25x1,5	18,9	609	3K1207705	25x2,5	22,4	921	500-1000 mt
3K1206205	30x1,5	20,1	715,3	3K1207805	30x2,5	23,9	1.084,4	500-1000 mt
3K1206305	36x1,5	21,9	853,4	3K1207905	36x2,5	26	1.288,3	500-1000 mt
3K1206405	40x1,5	22,9	940,3	3K1208005	40x2,5	27,2	1.421,6	500-1000 mt
3K1208405	50x1,5	26,1	1.172,7	3K1208505	50x2,5	31	1.776,2	500-1000 mt

