


# YSLYCY-JZ

Genel Blendajlı, Damarları Numara Kodlu Ince, Hafif Kontrol Kablosu  
Overall Screened, Thin and Lighter Control Cables With Number Coded Conductors

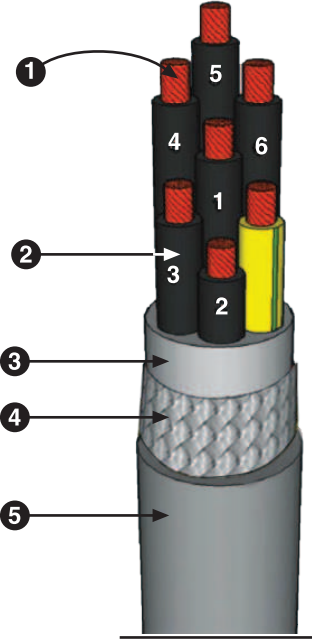

RoHS

CE

## YAPISI / CONSTRUCTION

- 1 İLETKEN / CONDUCTOR  
IEC 60228 VDE 0295 Class 5 SnCu
- 2 YALITKAN / INSULATION  
VDE 0207 PVC Y12  
DAMAR RENKLERİ / CORE COLOURS  
VDE 0293 (J) (JZ) (OZ)
- 3 ARA KILIF / INNER SHEATH  
PVC
- 4 GENEL EKLAN / OVERALL SCREEN  
Bakır örgü / copper wire braid
- 5 DIŞ KILIF / JACKET  
PVC YM2 GR1 / GRAY

## TEKNİK VERİLER / TECHNICAL DATA

1. BÜKÜM ÇAPI / BENDING RADIUS  
15 x kablo çapı  
15 x cable diameter
2. ÇALIŞMA GERİLİMİ / WORKING VOLTAGE  
400-500 V
3. TEST GERİLİMİ / TEST VOLTAGE  
2,5 KV
4. ÇALIŞMA SICAKLIĞI / TEMP RANGE  
Hareketli kullanım / Flex using  
-5 / +50 °C  
Sabit kullanım / Fixed using  
-30 / +70 °C
5. YALITIM DİRENCİ / INSULATION RESISTANCE  
min.20 MΩ km

● YSLYCY-JZ Damarları katlar şeklinde bükülü, bakır blendajlı ve PVC dış izolasyonlu bu kablolar, makine, cihaz, pano bağlantılarında, ısıtma, soğutma, havalandırma sistemlerinde kuru ve nemsiz ortamlarda kontrol ve kumanda kablosu olarak kullanılır. Bakır örgü ekranlama, elektro magnetik yapısıyla çevredeki etkileşimi engeller.

● YSLYCY-JZ construction is conductors stranding in layers with Cu braiding screen and PVC outer jacket. Used for measuring and data processing in the machine tool manufacturing, control panels, control systems, in dry and wet interiors at medium mechanical stress. It is not suitable for continuously movements and tensile load.

## AÇIKLAMA / NOTES

### STANDART ÜRETİM / STANDART PRODUCT

(JZ) : Siyah damar (numara kodlu) + sarı-yeşil damar Black cores (numbered) + green-yellow core

(OZ) : Siyah damar (numara kodlu) Black cores (numbered)

### ÖZEL ÜRETİM / SPECIAL PRODUCE

(J) : Damarlar renk kodlu + sarı-yeşil damar Coloured cores and green-yellow core

CE : Ürün, 73/23/EWG ve 93/68/EWG sayılı düşük voltaj yönetmeliğine uygundur.  
: The product is conformed with the EC Low-Voltage Directive 73/23/EEC and 93/68/EEC

## SİPARİŞ BİLGİLERİ / ORDERING DATA

KOD NO. Code No.	KESİT mm <sup>2</sup> Cross Sec mm <sup>2</sup>	ÇAP mm Dia mm	KG/KM kg/km
3K1300105	2x0,50	7,4	77,7
3K1300205	3x0,50	7,9	89,9
3K1300305	4x0,50	8,5	108,4
3K1300405	5x0,50	9,2	126
3K1300505	6x0,50	9,7	144
3K1300605	7x0,50	9,9	15,5
3K1200705	8x0,50	11	186,2
3K1200805	10x0,50	11,8	210,7

KOD NO. Code No.	KESİT mm <sup>2</sup> Cross Sec mm <sup>2</sup>	ÇAP mm Dia mm	KG/KM kg/km
3K1301005	14x0,50	12,9	226,4
3K1301105	16x0,50	13,4	286,9
3K1301205	19x0,50	14,2	323,2
3K1301305	25x0,50	16,5	427,8
3K1301405	30x0,50	17,4	487,6
3K1301505	36x0,50	18,9	571,5
3K1301605	40x0,50	19,4	609,6
3K1308205	50x0,50	21,8	746,4

AMBALAJ MİKTARLARI Spool Sizes
500-1000 mt
500-1000 mt
500-1000 mt
500-1000 mt
500-1000 mt
500-1000 mt
500-1000 mt
500-1000 mt
500-1000 mt

